



**GLF - LAMİNAR TAVAN SİSTEMELRİ /
LAMINAR FLOW UNITS IN OPERATING THEATRES**

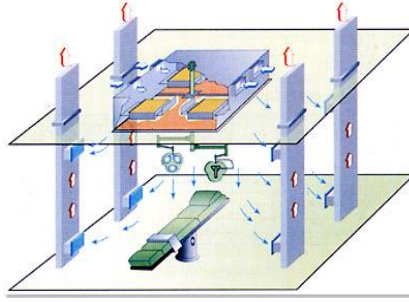

GLF PRODUCT SPECIFICATIONS:

- Standard Material: 304 Stainless Steel. Optional: Galvanized Steel Sheet
- Usable for sterility-sensitive places such as operating rooms, chemical labs and clean rooms.
- Laminar flow provides removal of particles and microbes from requested area.
- According to DIN 1946/4 and DIN 25414, especially surgeries that require a high level of sterility fulfillment of the conditions. 100% Leakproof tested.
- Proper disinfection and ease of maintenance.
- Mounted easily to all types of ceilings

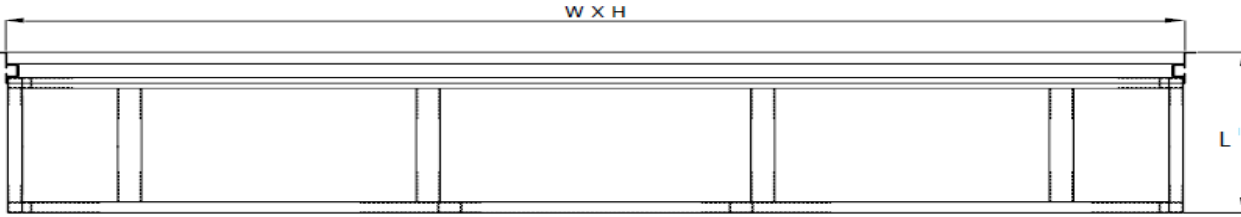

HIZLI SEÇİM TABLOSU

Item	W(mm)	H(mm)	L(mm)	Air Flow (m ³ /h)	Velocity m/sn	Average Sound Power Level [dB]	Pressure Loss at Start (Pa)	Pressure Loss at Final(Pa)
1	2400	1200	450	2400	0,23	35	120	600
2	2400	1400	450	2800	0,23	35	150	600
3	2400	1600	450	3200	0,23	30	110	600
4	2400	1800	450	3600	0,23	30	130	600
5	2400	2000	450	4000	0,23	35	120	600
6	2400	2200	450	4400	0,23	35	130	600
7	2400	2400	450	4800	0,23	35	150	600
8	3000	2400	450	6000	0,23	35	120	600
9	3000	2800	450	7000	0,23	40	160	600
10	3000	3000	450	7500	0,23	40	170	600

